


KVM HDMI 4x1 Quad Multi-viewer (4K@30Hz) User Manual




Physical interface diagram

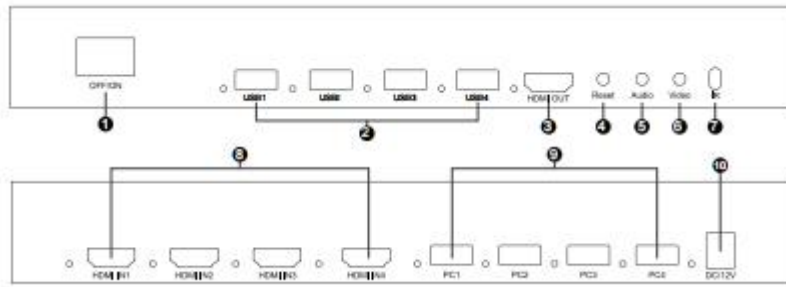

- | | |
|------------------------------------|---|
| 1: OFF/ON --- Power switch; | 2: USB1 - USB4 --- Keyboard/Mouse port; |
| 3: HDMI Out --- HDMI output port; | 4: Reset --- Reset button; |
| 5: Audio --- Audio switch; | 6: Video --- Video switch; |
| 7: IR --- Infrared receiving port; | 8: HDMI In1-4 --- HDMI input port; |
| 9: PC1-4 --- PC input port; | 10: DC/12V --- DC 12V power port; |

Remote control instructions

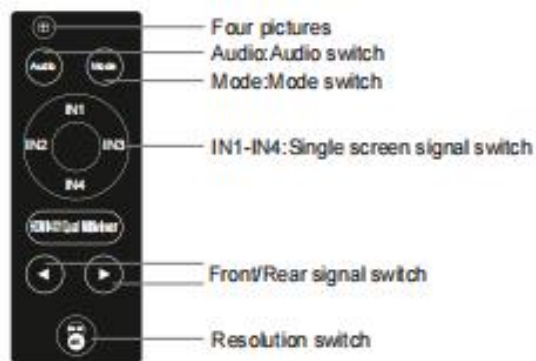

Applications



KVM (mouse and keyboard) connection operation

- 1.1: Connect PC1-PC4 ports on the multi-viewer and signal source (such as USB port on the computer) with 4 USB 2.0 cable.
 - 1.2: Connect the "USB1-USB4" ports on the multi-viewer with USB mouse and keyboard.
 - 2.1: KVM synchronization function mode, click '*'+'A' to enter the synchronization mode, and the 4 LEDs on the 'PC1-PC4' port will all light up, then the mouse and keyboard can control the PC on the 4 ports at the same time (Such as a computer); if you want to exit the synchronization function, click '*'+'A' or enter other switching modes to exit.
 - 2.2: Kvm function switch:
PC1: click '*'+'F1' PC2: click '*'+'F2'
PC3: Click '*'+'F3' PC4: Click '*'+'F4'
 - 2.3: Mouse through mode: Click '*'+'S' to move the mouse through PC1-PC4.
- Note: The USB1-USB4 port is connected to the mouse and keyboard. After the multi-viewer is powered on, it is connected to the 'PC1' port by default. When the LED of that PC port is on, it is switched to the corresponding PC. It takes a certain amount of time (usually a few seconds, depending on the operating system) when each PC port is connected to the signal source for the first time, and the control can be quickly switched after connection.

Keyboard hotkey:

- '*'+ '1': Choosing HDMI IN1 signal ;
- '*'+ '2': Choosing HDMI IN2 signal ;
- '*'+ '3': Choosing HDMI IN3 signal ;
- '*'+ '4': Choosing HDMI IN4 signal ;
- '*'+ '5': Quad multiviewer mode ;
- '*'+ '6': One big and three small mode ;
- '*'+ '7': Four pictures-H mode ;
- '*'+ '8': Three small mode ;
- '*'+ '9': Pictures in pictures mode ;
- '*'+ 'F5' : Left and right dual picture mode(In1/In2) ;
- '*'+ 'F6' : Left and right dual picture mode (In3/In4) ;
- '*'+ 'F7' : Switch output resolution (4K/1080P/720P);
- '*'+ 'PgUp' : Up and down dual picture mode(In1/In2) ;
- '*'+ 'PgDn' : Up and down dual picture mode(In3/In4) ;
- '*'+ 'F9' : Mouse absolute coordinate mode (PC);
- '*'+ 'F10': Mouse Relative Coordinate Mode (NVR)

Note: If the mouse through function cannot be used, Please confirm that it is mouse absolute coordinate mode (* + F9).

The Package includes

1. KVM HDMI 4x1 quad multi-viewer	1PC	2. Power adapter	1PC
3. A type USB cable	4PCS	4. Remote control	1PC
5. User manual	1PC		