

# **60m HDMI Extender + Audio**


## **User Manual**



## Connecting and operating

1. Connect one HDMI cable between source device and TX Extender, the max cable distance is 10 meters;
2. Connect one HDMI cable between display device and RX Extender, the max cable distance is 15 meters;
3. Connect single cat-5e or cat-6 (recommended) cables instead of HDMI cables between TX and RX Extender, the max cable distance is 60 meters;
4. Connect 5V power supply to the TX and RX;
5. EDID button: The button can support the switch of EDID between 720P and 1080P. (1080P is the default EDID when the power is on).

## Connection diagram

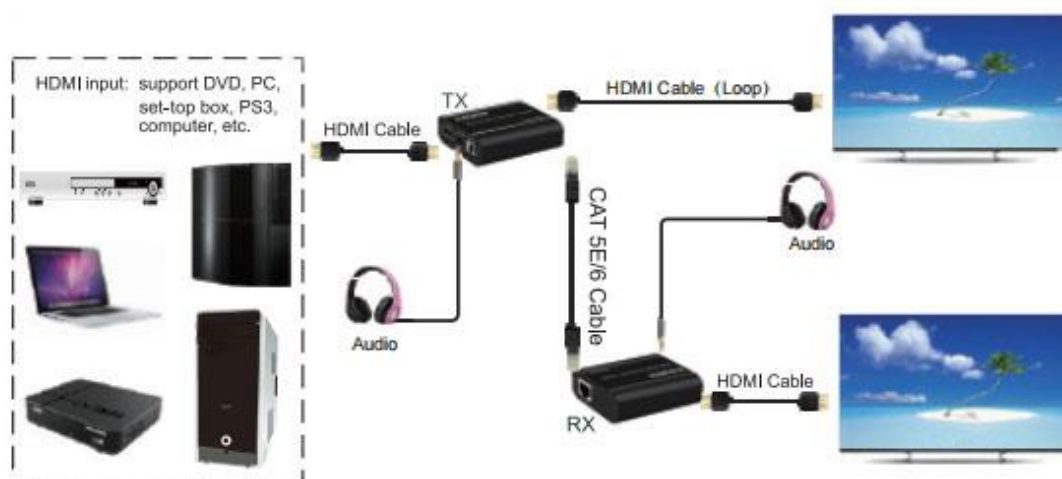

## Application diagrams

HDMI extender is used in audio-visual conference, command and control center, ticketing platform, home theater, multi-media teaching, conference system and so on.



Audio-visual conference



Command and control center




Home theater

## Physical interface diagram



Port	Function description
Input	HDMI Input port
Audio	Stereo output
DC/5V	5V DC Power input port
CAT5E/6	Cat5e/6 cable connection port
Output	HDMI Loop-out port
EDID	1080P and 720P switch button (Press for 3 seconds)

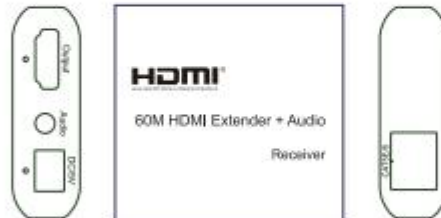

Port	Function description
Output	HDMI Output port
Audio	Stereo output
DC/5V	5V DC Power input port
CAT5E/6	Cat5e/6 cable connection port

## The package includes:

- |                |      |                           |      |
|----------------|------|---------------------------|------|
| 1. TX Extender | 1pcs | 3. 5V/1A DC Power adapter | 2pcs |
| 2. RX Extender | 2pcs | 4. User Manual            | 1pcs |